




P130 Big Flow Condensate Pump

Reliable Operation, Easy Maintenance

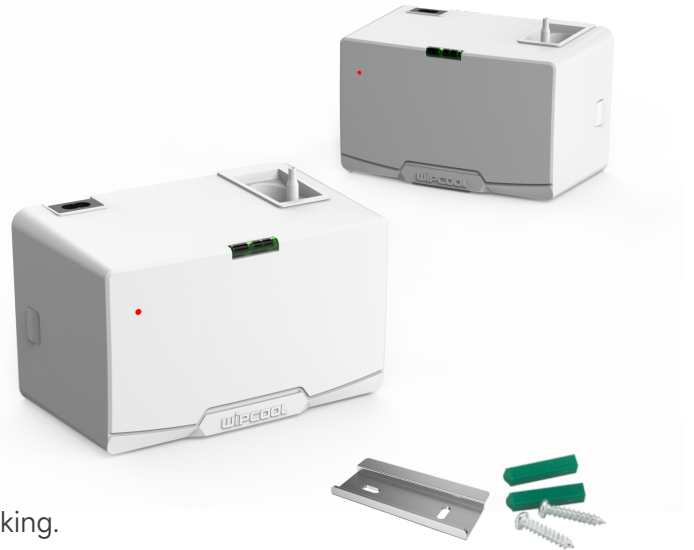

Floatless structure, free maintenance for long time working.



High performance centrifugal pump, handling dirty & oily water..



Forced air cooling motor, ensures stable running.



Anti-backflow design to improve the safety drainage.



130 L/h
Max flow



25 dB(A)
Sound level



3.5 m
Max rec. head

Technical Data

Flow Rate

Model	P130
Voltage	100-230 V~ / 50-60 Hz
Discharge Head(Max.)	3.5 m (12 ft)
Flow Rate(Max.)	130 L/h (34 GPH)
Tank Capacity	650 mL
Sound Level at 1m	25 dB(A)
Ambient Temp.	0 °C - 50 °C
Power Consumption	10 W
Packing	Carton: 12 pcs

