


MRS10 Hydrocarbon Programable Charging Scale

Professional Design, Accurate Charging

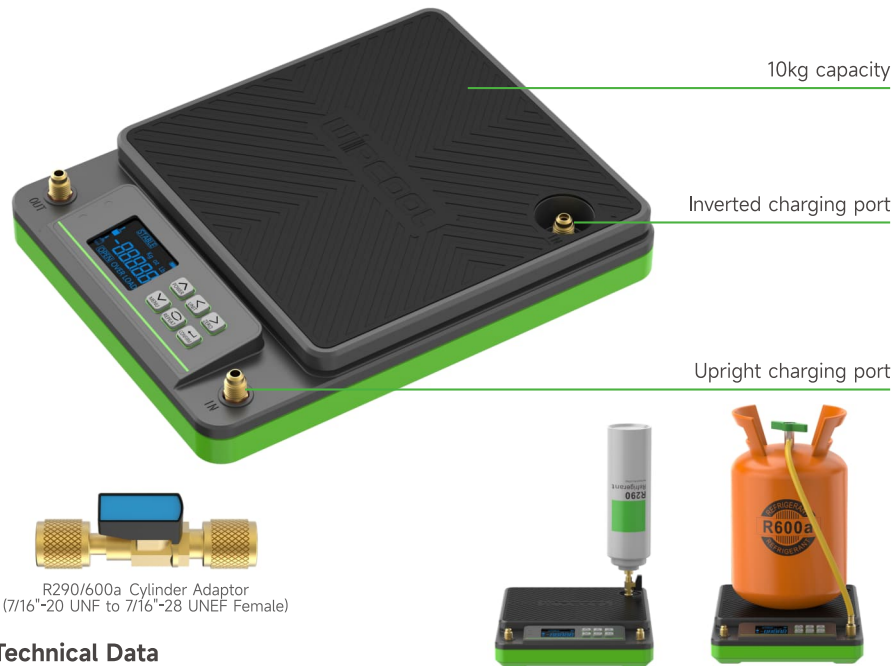

Technical Data

Model	MRS10	MRS10K
Capacity	10kg	
Resolution	1g / 0.1oz / 0.002Lb	
Accuracy	0.05%	
Display Units	Kg / oz / Lb	
Operating Temperature	0 °C - 50 °C (32 °F - 122 °F)	
Storage Temperature	-10 °C - 60 °C(14 °F - 140 °F)	
Power Supply	3*3.7V Li-ion battery (18650,2400mAh)	
Battery Life	60 hours (full charge)	
Remark	Due to the strict transportation terms, we can not include any Li-ion battery and charger, you can buy from your local market.	
Accessories	R290/600a Cylinder Adaptor (7/16"-20 UNF to 7/16"-28 UNEF Female)	R290/600a Cylinder Adaptor Single Valve Manifold , 2*45cm hose, Locking Plier(HL-1)
Packing	Tool bag / Carton: 5 pcs	Tool box / Cartons: 5 pcs

MVG-1 Digital Vacuum Gauge

Large Display, High Accuracy



Technical Data

Model	MVG-1
Measuring Range	0-19000 microns
Operating Temperature	-4 °F-140 °F(-20 °C-60 °C)
Interface	1/4" SAE
Accuracy	1-10,000 microns: ±10% of readings ±10 microns 10,000-19,000 microns: ±20% of readings
Resolution	1-400microns 1 micron 400-3000microns 10 microns 3000-10000microns 100 microns 10000-19000microns 250 microns
Vacuum Units	microns, mTorr, in/hg, Pa, Torr, KPa, mbar and psi
Battery	Rechargeable lithium battery (1,000 mAh)
Overload	27.5 bar
Packing	Carton: 24 pcs