

TV-15 Tube Pressure Testing Valve

The TV-15 pipe pressure test valve allows hydraulic leak testing of installations that need to be leakproof up to 15bar. It is ideal for use in heating, compressed air, refrigeration systems, sprinkler systems and other small-bore pipe installations.

Unlike conventional manual and electric pressure test pumps, the TV-15 offers the most economical solution. It is suitable not only for WIPCOOL high pressure cleaning machines (C28T, 28B, C40T), but also for all other high pressure washers on the market (1/4 inch connector). Therefore if you own a washer, you can expand new functions by simply purchasing the TV-15.

In addition, it comes with a quick-connect system for quick disconnection of the test valve. The test valve can be left on the circuit being tested. The washer can be operated with a second test valve to pressurize another circuit.

TV-15 Pressure Testing Valve

Professional, Fast & Efficient



1/4" fitting can fit with all of high pressure cleaning machines on the market.



The automatic pressure holding valve enables the user to easily pressurize the system.





Tests all types of installation such as heating, compressed air and refrigeration systems.



5 L/min
Maximum water flow



15 bar
Max testing pressure

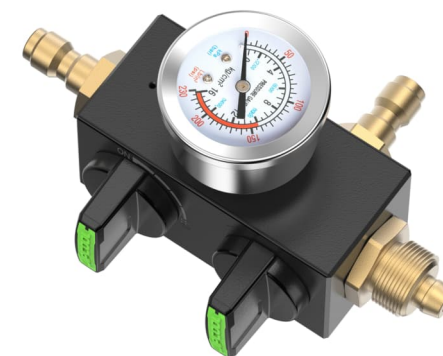

Technical Data

Model	TV-15
Pressure Testing(Max.)	15 bar
Water Flow	5 L/min
Coupling Fitting	1/4"
Suitable For	C28T,C28B,C40T
Dimension(mm)	140.3*93.5*73.3

Accessories



Sealing Cover